




- Using CMOS IC, Accurate and stable operation
- High reliability by S.M.T.(Surface Mounting Technology)
- Two output contacts or Four output contacts
- AC and DC supply voltage
- Two LED'S provids status indication for power ON and time UP
- Compatible with MY relay socket
- Flush mounting with(Type Y-20) adapter

## SPECIFICATIONS


FULL TIME RANGE		SEC: 1, 3, 6, 10, 30, 60 MIN: 3, 6, 10, 30, 60 H R: 3		
RATED VOLTAGE		DC(V): 12, 24, 48 AC(V): 12, 24, 48, 110, 220, 240, 380, 50/60Hz		
INDICATOR OPERATING		ON-Green UP-Red		
o/p C O N T A C T	MODEL	H3Y-2		H3Y-4
	TIME LIMIT 1C			
	TIME LIMIT 2C	5A		5A(4C)
	INSTANTANEOUS 1C			
LIFE	MECHANICAL	5 x 10 <sup>6</sup> times		
	ELECTRICAL	10 <sup>5</sup> times		
RESET TIME		0.2 sec max		
CONSUMED POWER		3VA		
AMBIENT TEMPERATURE		-10°C~ +55°C		
AMBIENT HUMIDITY		45~85%RH		
WEIGHT		Approx. 45g		

## CONNECTION DIAGRAMS & TIMING CHARTS

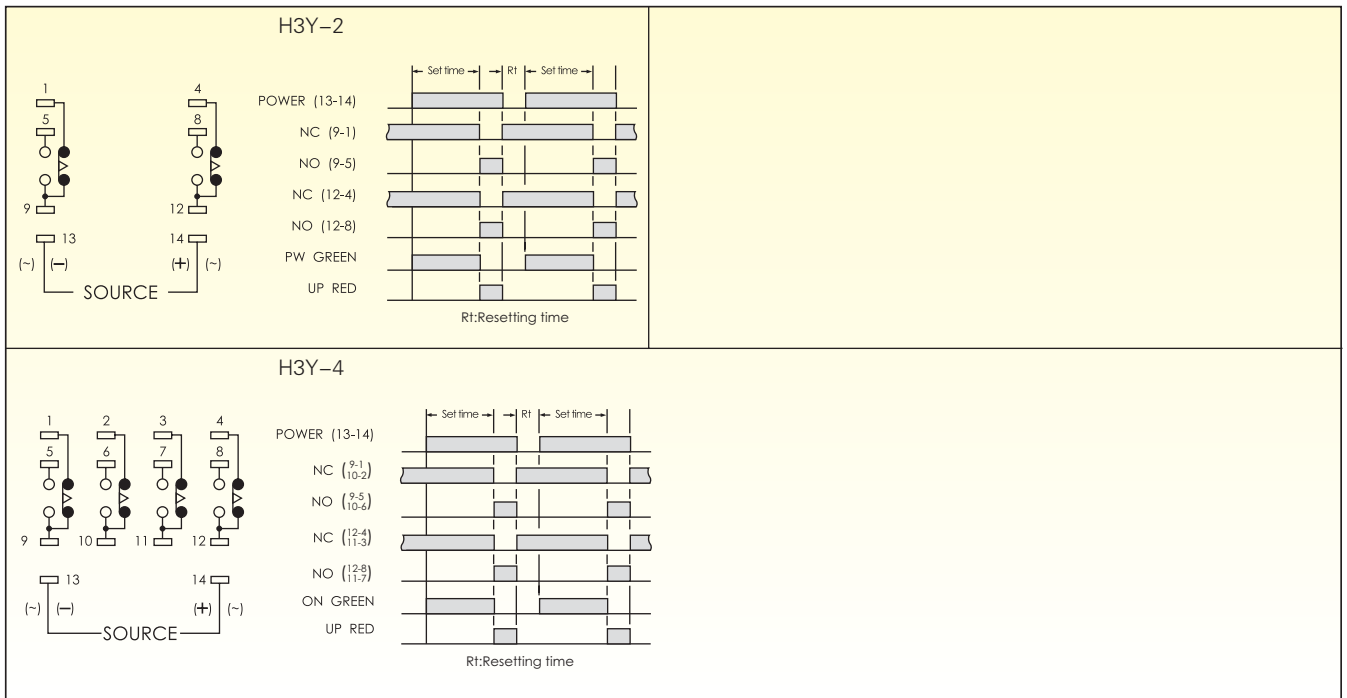

## DIMENSION

H3Y-2/H3Y-4

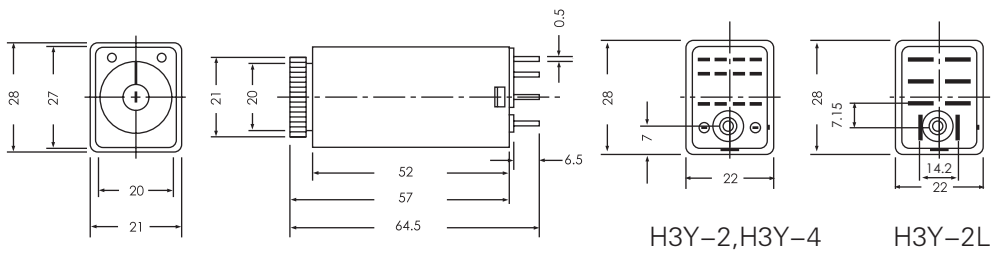

H3Y-2/H3Y-4WithY-20

